

PCB LAYOUT
Ref.

MATERIALS:

- HOUSING-PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
 - INSERT HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0.
 - CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
 - HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

NOTE:



1. A AND B HIGHEST POINT
MUST OVER C FLAT SURFACE.
2. THE MAXIMUM DISTANCE ($0.15m/m$)
BETWEEN LOWEST AND HIGHEST
ON A AND B FLAT SURFACE.

Ordering Information

AJS55A	4	4	1	X
Type	Positions	Contacts	Ports	Plating 3 = 30u" 4 = 50u"

<p>Tolerance unless otherwise specified mm</p> <p>.0 ± .25</p> <p>.00 ± .13</p> <p>.000 ± .05</p>

RIA CONNECT	P/N: AJS55A441X
Desc.: Top entry, SMT, 4P/4C	
Date: 11-3-09	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian

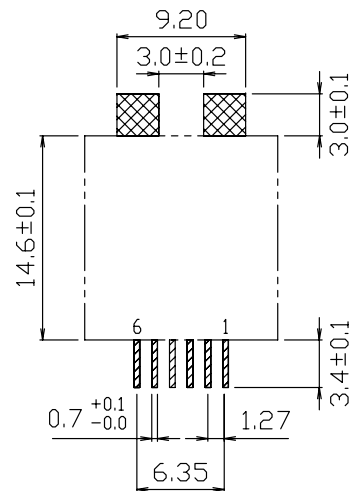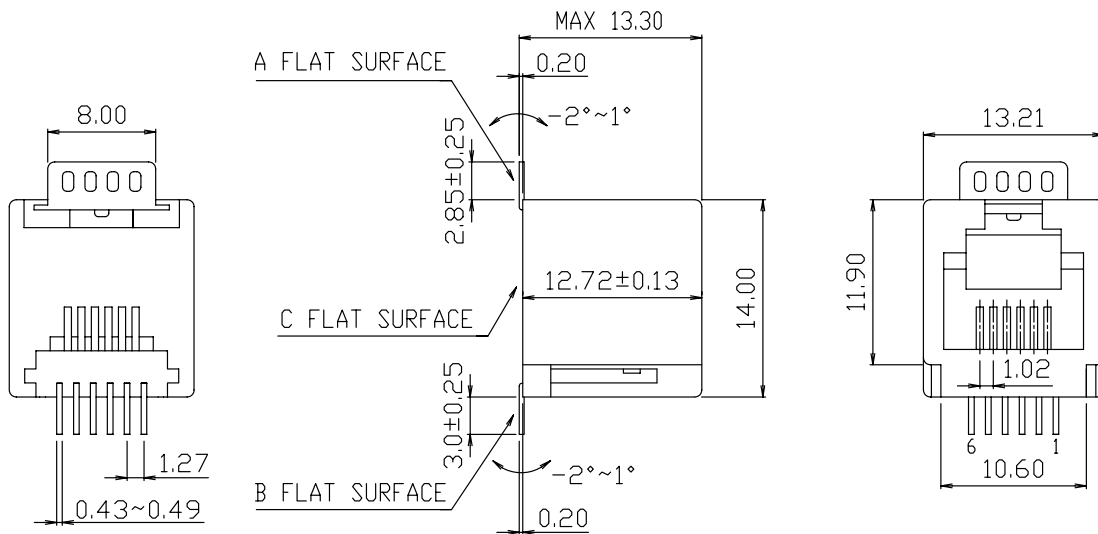

PCB LAYOUT
Ref.

MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL 94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

NOTE:

1. A AND B HIGHEST POINT
MUST OVER C FLAT SURFACE.
2. THE MAXIMUM DISTANCE (0.15m/m)
BETWEEN LOWEST AND HIGHEST
ON A AND B FLAT SURFACE.

Ordering Information

AJS55A	6	6	1	X
Type	Positions	Contacts	Ports	Plating 3 = 30u" 4 = 50u"

Tolerance unless otherwise specified mm .0 ± .25 .00 ± .13 .000 ± .05
--

RIA CONNECT	P/N: AJS55A661X
Desc.: Top entry, SMT, 6P/6C	
Date: 11-3-09	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian