


Specifications
Description AJT28L


Top entry
LED
Standard profile
8 positions
Stamped pins

Technical Data AJT28L

Contact: 0.35mm diameter phosphor bronze
Plating: Selective gold plating
Housing: FR50 94V0+25% BK
Plating: 30u" gold
Environmental: Storage: -40°C to +85°C
Operation: -40°C to +85°C

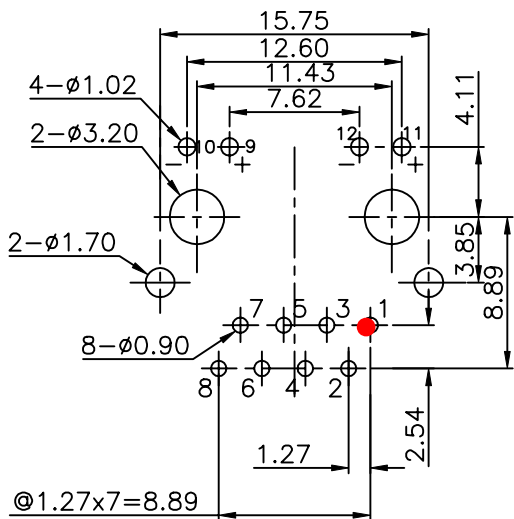

PC BOARD LAYOUT
COMPONENT SIDE SHOWN

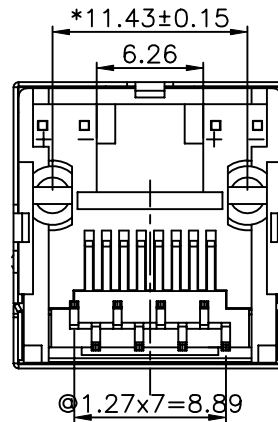

Ordering Information

AJT28L	8	8	1	3-0	X	1
Type	Positions	Contacts	Ports	Plating 3 = 30u" 4 = 50u"		No Tabs

	LED1	LED2		LED1	LED2
1=	Yellow	Green	5=	Green	Red
2=	Green	Green	6=	Red	Green
3=	Green	Yellow	7=	Yellow	Yellow
4=	Green	Orange	8=	Gm/Ylw	Gm/Ylw

● = Pin 1

Tolerance
unless otherwise specified

.0 ± 0.20
.00 ± 0.15
.000 ± 0.075
angle ± 0.5

RIA CONNECT	P/N: AJT28L8813-0X1
Desc.: Top entry, shielded, LED, thru hole modular jack	
Date: 10-22-07	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian