


MATERIALS:

- HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK.
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
- SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

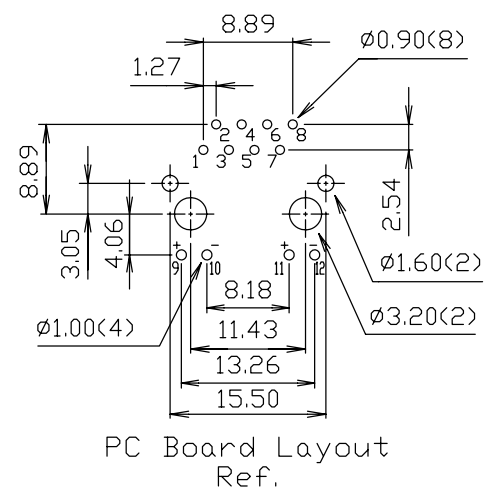

Ordering Information

AJT33L	8	8	1	X-0	X	4
Type	Positions	Contacts	Ports	Plating 3 = 30u" 4 = 50u"	Top & Side Tabs	

LED1	LED2	LED1	LED2
1= Yellow	Green	5= Green	Red
2= Green	Green	6= Red	Green
3= Green	Yellow	7= Yellow	Yellow
4= Green	Orange	8= Grn/Ylw	Grn/Ylw

**\*Note:** AJT33L has replaced the AJT30L series. Pricing and specifications subject to change. Please review before ordering.

Tolerance unless otherwise specified
.0 ± .25
.00 ± .13
.000 ± .05

<b>RIA</b> CONNECT	P/N: AJT33L881X-0X4 *
Desc.: Side entry, single port RJ45, LED	
Date: 7-27-09	
Dimensions in mm Drawn By: Donna Mears	