


DETAIL X

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F.

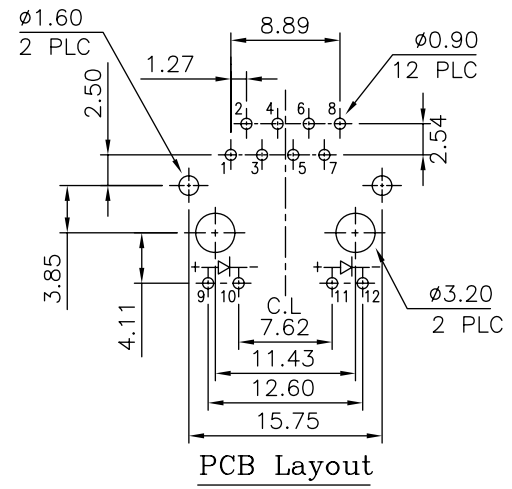

PCB Layout

Ref.

Ordering Information

AJT39L	8	8	1	X-0	X	1
Type	Positions	Contacts	Ports	Plating	No Tabs	
				3 = 30u"		
				4 = 50u"		

LED1	LED2	LED1	LED2
1= Yellow	Green	5= Green	Red
2= Green	Green	6= Red	Green
3= Green	Yellow	7= Yellow	Yellow
4= Green	Orange	8= Grn/Ylw	Grn/Ylw

Tolerance
unless otherwise specified
mm
.0 ± .25
.00 ± .13
.000 ± .05

RIA CONNECT

P/N: AJT39L881X-0X1

Desc.: Top entry, shielded, LED, thru hole modular jack

Date: 12-22-09

Drawn By: Donna Mears

Dimensions in mm

Verified By: Mike Balekdjian