
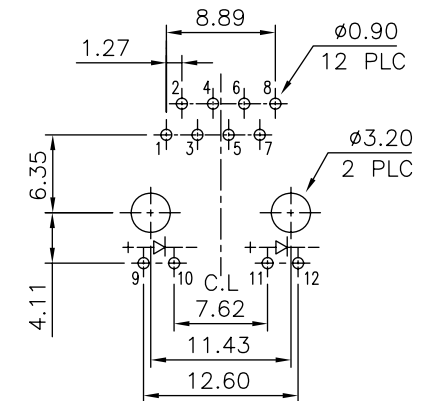


MATERIAL:
 ◦ HOUSING—PBT POLYESTER UL94V-0
 MIXED GLASS FIBER.
 STANDARD COLOR—BLACK
 ◦ CONTACTS—0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 GOLD FLASH IN SOLDER AREA.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

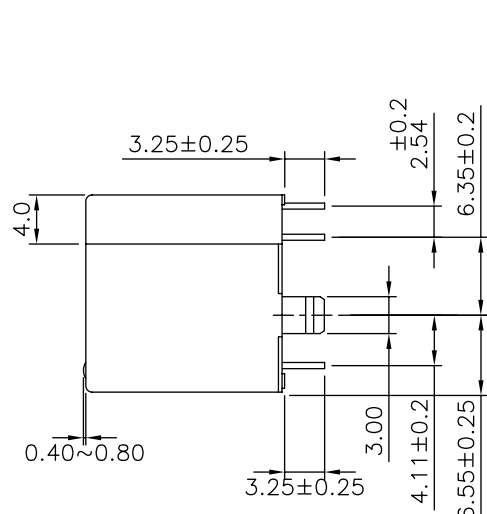

PCB Layout
 Ref.

Ordering Information

AJT40L	8	8	1	X-0	X	0
Type	Positions	Contacts	Ports	Plating 3 = 30u" 4 = 50u"	No Shield	

LED1	LED2	LED1	LED2
1 = Yellow	Green	5 = Green	Red
2 = Green	Green	6 = Red	Green
3 = Green	Yellow	7 = Yellow	Yellow
4 = Green	Orange	8 = Grn/Ylw	Grn/Ylw

Tolerance
 unless otherwise specified
 mm
 .0 ± .25
 .00 ± .13
 .000 ± .05

RIA CONNECT	P/N: AJT40L881X-0X0
Desc.: Top entry, unshielded, LED, thru hole modular jack	
Date: 12-22-09	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian