


MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V—0
 - CONTACTS—0.35mm THICK PHOS—BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
 - SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

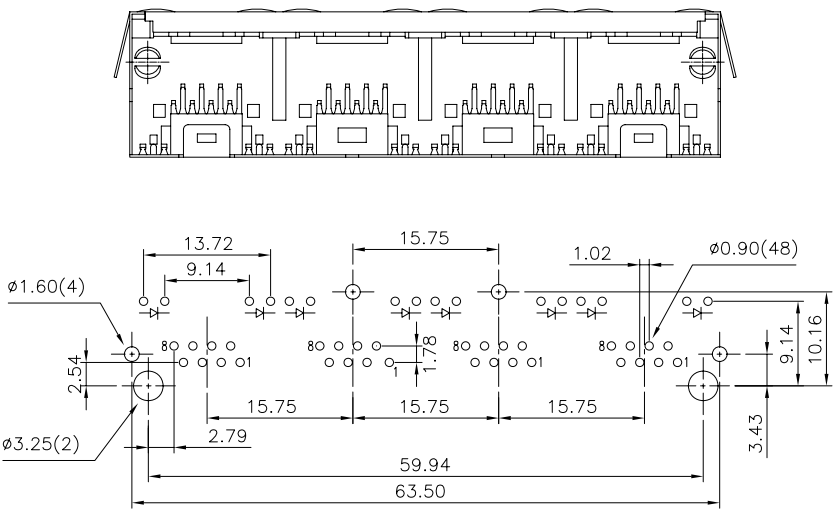

PCB LAYOUT (Ref.)

Ordering Information

AJT41L | 8 | 8 | 4 | X-0 | X | X

Type Positions Contacts Ports Plating Tabs
 1 = 6u" 0 = No Shield
 2 = Top Tabs 1 = No Tabs
 3 = Side Tabs 2 = Top Tabs
 4 = Top & Side Tabs 3 = Side Tabs
 4 = Top & Side Tabs

	LED1	LED2		LED1	LED2
1=	Yellow	Green	5=	Green	Red
2=	Green	Green	6=	Red	Green
3=	Green	Yellow	7=	Yellow	Yellow
4=	Green	Orange	8=	Grn/Ylw	Grn/Ylw

Tolerance
 unless otherwise specified
 mm
 .0 ± .25
 .00 ± .13
 .000 ± .05



P/N: AJT41L884X-0XX

Desc.: Side entry, shielded, LED, thru hole modular jack

Date: 1-26-10

Drawn By: Donna Mears

Dimensions in mm

Verified By: Mike Balekdjian