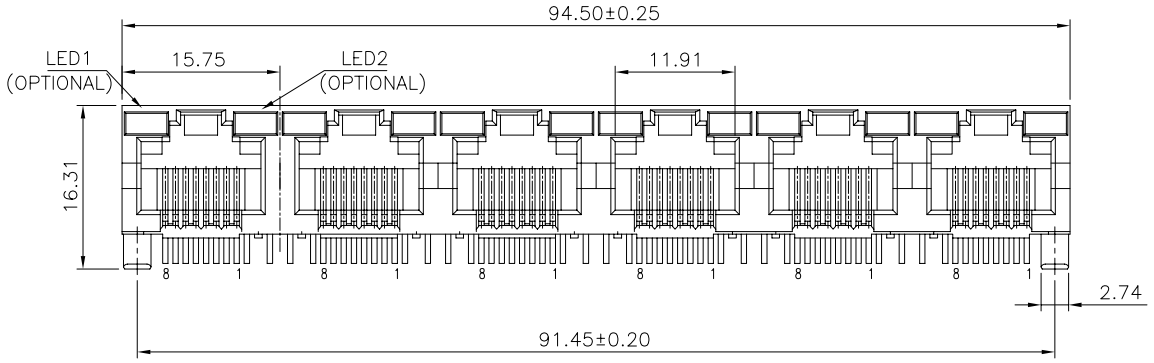

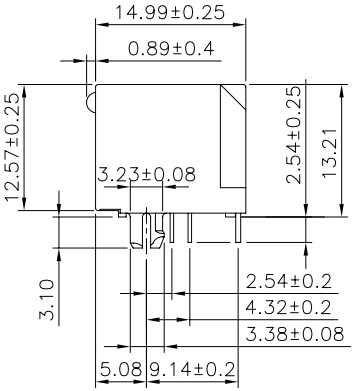

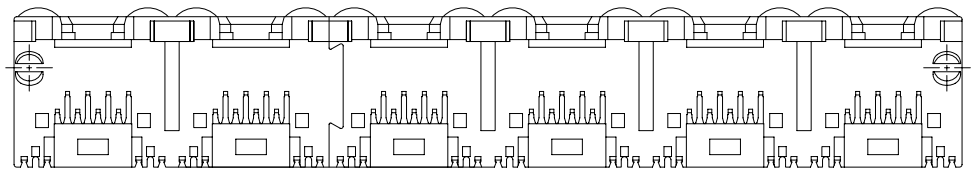

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
  HEAT DEFLCTION TEMP.290°
  BLACK COLOR, UL94V—0
- CONTACTS—0.35mm THICK PHOS—BRONZE PLATED
  WITH HARD GOLD AND TIN/LEAD IN
  SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

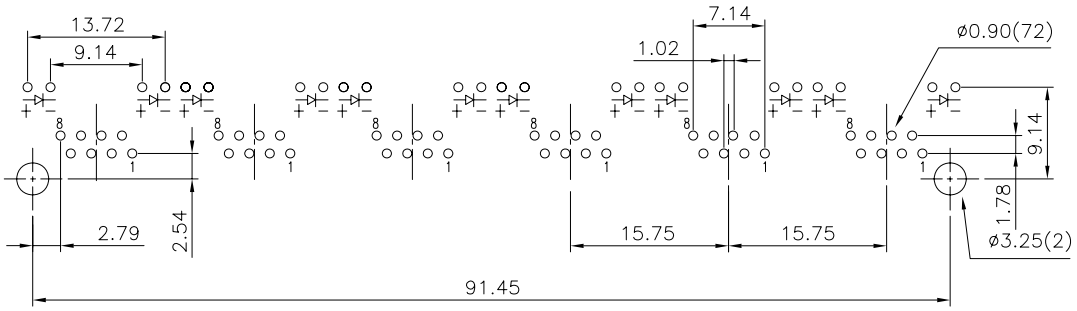

PCB Layout (Ref.)

Ordering Information

AJT42L	8	8	6	X-0	X	0
Type	Positions	Contacts	Ports	Plating 1=6u" 3=30u"		Tabs 0=No Shield

	LED1	LED2
1=	Yellow	Green
2=	Green	Green
3=	Green	Yellow
4=	Green	Orange

	LED1	LED2
5=	Green	Red
6=	Red	Green
7=	Yellow	Yellow
8=	Grn/Ylw	Grn/Ylw

Tolerance
unless otherwise specified
mm
.0 ± .25
.00 ± .13
.000 ± .05

RIA CONNECT

P/N: AJT42L886X-0X0

Desc.: Side entry, unshielded, LED, thru hole modular jack

Date: 8-23-10
Dimensions in mm

Drawn By: Donna Mears
Verified By: Mike Balekdjian