


- MATERIALS:
- BOTTOM HOUSING-DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
  - TOP HOUSING-PBT POLYESTER UL94V-0  
MIXED GLASS FIBER, BLACK COLOR.
  - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
  - SHIELD-0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

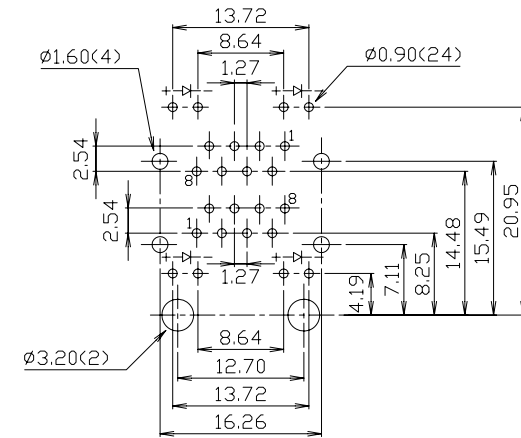

PCB LAYOUT  
Ref.

Ordering Information

AJT44L 8 8 2 X-0 X 4

Type Positions Contacts Ports Plating  
1 = 6u"  
3 = 30u"

∣ Tabs  
4 = Top &  
Side Tabs

	LED1	LED2		LED1	LED2
1=	Yellow	Green	5=	Green	Red
2=	Green	Green	6=	Red	Green
3=	Green	Yellow	7=	Yellow	Yellow
4=	Green	Orange	8=	Grn/Ylw	Grn/Ylw

Tolerance  
unless otherwise specified  
mm  
.0 ± .25  
.00 ± .13  
.000 ± .05

**RIA**CONNECT

P/N: AJT44L882X-0X4

Desc.: Side entry, 2 X 1, shielded, LED, thru hole modular jack

Date: 2-2-10

Drawn By: Donna Mears

Dimensions in mm

Verified By: Mike Balekdjian