
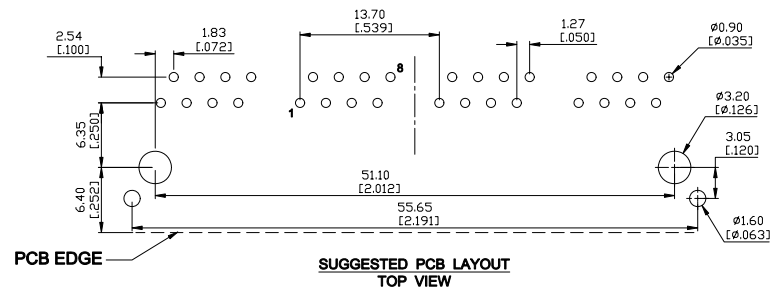


**Electrical Characteristics :**  
**Insulation Resistance : 500MΩ Min.**  
**Contact Resistance : 50mΩ Max.**  
**Withstand Voltage : 1000 VAC 1 minute.**  
**Current Rating : 1.5A**

**Material:**  
**Housing: Thermoplastic UL 94V-0**  
**Contact : Selective Gold Plating**  
**Terminal: 0.35mm Thickness Phosphor Bronze**  
**Plated With Gold And Tin In Solder Area.**

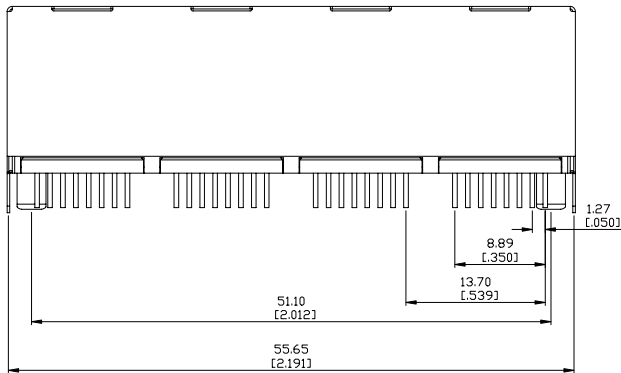

**Ordering Information**

AJT52D	8	8	4	X
Type	Positions	Contacts	Ports	Plating
				1 = 6u"
				3 = 30u"

**Tolerance**  
 unless otherwise specified  
 mm  
 .0 ± .25  
 .00 ± .15  
 .000 ± .075

<b>RIA</b> CONNECT	P/N: AJT52D884X
Desc.: Top entry, shielded, thru hole modular jack	
Date: 3-25-10	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian