


**DETAIL Y**

MATERIAL:  
 • HOUSING-DSM STANYL TE250F6 (NYLON-46)  
 HEAT DEFLECTION TEMP.290°  
 BLACK COLOR, UL94V-0  
 • CONTACTS-0.35mm THICK PHOS-BRONZE  
 PLATED WITH HARD GOLD AND  
 GOLD FLASH IN SOLDER AREA.  
 • SHIELD-0.25mm THICK COPPER ALLOY,  
 PLATED WITH NICKEL.  
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

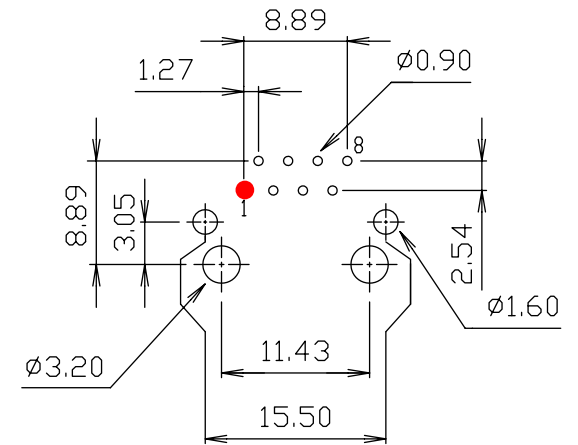

PCB LAYOUT  
 Ref.

**Ordering Information**

AJT65B	8	8	1	3
Type	Positions	Contacts	Ports	Plating
				3 = 30u"
				4 = 50u"

<b>Tolerance</b> unless otherwise specified mm
.0 ± 0.25
.00 ± 0.13
.000 ± 0.05

<b>RIA</b> CONNECT	P/N: AJT65B8813
Desc.: Side entry, CAT 5e, shielded, thru hole modular jack	
Date: 9-09-09	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian

● = Pin 1