





**Headers**



to ASP043

-  **Type 188** page 121
-  **Type 189** page 119
-  **Type 342** page 120
-  **Type 343** page 118


**ASP043**

Spring clamp terminal block, pluggable, centerline 3.5 mm / 0.138 inches, wire entry parallel to plug direction

**Technical Data**

-  **V / A / AWG** 300 / 8 / 28 - 16
-  **0.08 - 1.5 mm<sup>2</sup>** 130 V / 2.5 kV / 10 A
- Insulation co-ordination according to EN 60664-1  
Clearance and creepage distances min. 2.3 mm
- Insulating material class CTI 400
- Overvoltage category III III II
- Pollution degree 3 2 2
- Rated voltage 160 320 320
- Rated test voltage 2.5 4 2.5
- Protection category according to IEC 529 IP20
- Min. insul. strip length 6 mm
- Pole size 2 - 12
- Color black

Dimensions in mm 1 mm = 0.0394 in.

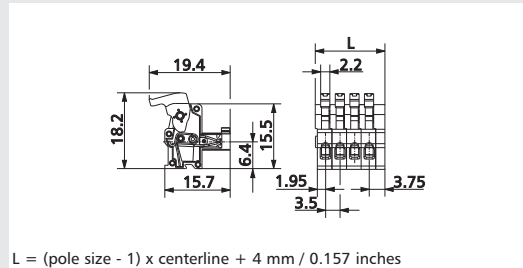

**Part numbers (P/N)** (information: page 16)



Complete the part number by adding the pole size.

**ASP043**

centerline 3.5 mm / 0.138 inches

P/N ASP043

	02	03	04	05	06	07	08
<input type="text"/>	09	10	11	12			

-  Standard pole sizes
-  Available on demand. Minimum order quantity 5000 pieces per item.