

**Headers**

to ASP129

Type 31336204-000190

page 140

**Accessories**

for ASP129

(only in combination with header type 31336204-000190)

**coding set**

700025 page 206

**ASP129**

Spring clamp terminal block, pluggable, centerline 10 mm / 0.394 inches, wire entry parallel to plug direction

**Technical Data**

0.08 - 2.5 mm<sup>2</sup> 750 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 11 mm

Insulating material class CTI 400

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 800 1600 1600

Rated test voltage 6 8 6


Protection category according to IEC 529 IP20

Min. insul. strip length 9 mm

Pole size 2 - 4

Color black

Dimensions in mm 1 mm = 0.0394 in.

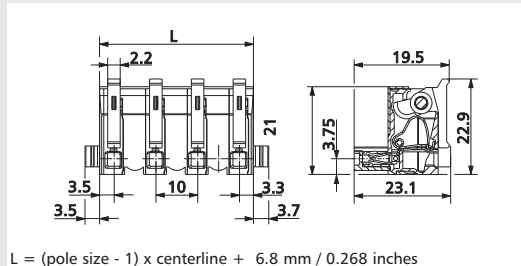

$L = (\text{pole size} - 1) \times \text{centerline} + 6.8 \text{ mm} / 0.268 \text{ inches}$

**Part numbers (P/N)**

(information: page 16)

Complete the part number by adding the pole size.

**ASP129**

centerline 10 mm / 0.394 inches

P/N ASP129

	02	03	04				

\* approval pending

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.