

Headers

to **Type 079**

Type 018 page 142

Type 028 page 142

Accessories

for **Type 079**

Coding set
716846 page 203

Mounting flange
750150 right
750151 left page 200

Coding pin
710121 short
710122 long page 202

Note for wire range

Additional wire sizes and/or combinations of same size wires as follows:

Type 79

#(1) Wire range extended to No. 30 AWG for factory-wiring.

+ Two same size wires
No. 22 - 16 AWG Cu Sol/Str for field-wiring;
No. 30 - 16 AWG Cu Sol/Str factory-wiring.

Type 079

Screw type terminal block, pluggable, centerline 5.08 mm / 0.200 inches, wire entry perpendicular to plug direction, wire protector, female contact

Technical Data

UL V / A / AWG 300 / 15 / 22 - 14

0.33 - 2.5 mm² 125 V / 2.5 kV / 10 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 2.3 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 160 400 400

Rated test voltage 2.5 4 2.5

Protection category according to IEC 529 IP00


Tightening torque UL 4.4 lb-in max.

Min. insul. strip length 6 mm

Pole size 2 - 3

Color black

Dimensions in mm 1 mm = 0.0394 in.

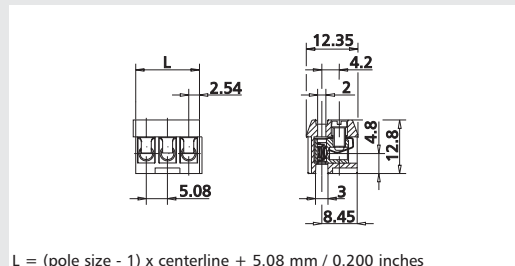

L = (pole size - 1) x centerline + 5.08 mm / 0.200 inches

Part numbers (P/N)

(information: page 56)

Complete the part number by adding the pole size.

Type 079

centerline 5.08 mm / 0.200 inches

P/N 310791

| | | | | | | | |
|--|----|----|--|--|--|--|--|
| | 02 | 03 | | | | | |
| | | | | | | | |
| | | | | | | | |

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.