

Headers

to Type 207
 Type 048 page 127

Accessories
 for Type 207 and Type 208
Coding pin
 720159 short page 202
 720159 long page 202
Mounting flange
 750313 right page 200
 750314 left page 200

Type 207

Screw type terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry perpendicular to plug direction, lift system, contact system with integrated wire protection

Technical Data

⊕ 0.08 - 2.5 mm² 250 V / 4 kV / 16 A

Insulation co-ordination according to EN 60664-1
 Clearance and creepage distances min. 3.2 mm
 Insulating material class CTI 600
 Overvoltage category III III II
 Pollution degree 3 2 2
 Rated voltage 250 630 630
 Rated test voltage 2.5 6 4

Protection category according to IEC 529 IP20
 Tightening torque UL 4.4 lb-in max.
 Min. insul. strip length 6 mm
 Pole size 2 - 24
 Color black

Type 208

Screw type terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry perpendicular to plug direction, lift system, contact system with integrated wire protection, factory inserted pins


Technical Data

⊕ 0.08 - 2.5 mm² 250 V / 4 kV / 15 A


Insulation co-ordination according to EN 60664-1
 Clearance and creepage distances min. 3.2 mm
 Insulating material class CTI 600
 Overvoltage category III III II
 Pollution degree 3 2 2
 Rated voltage 250 630 630
 Rated test voltage 2.5 6 4

Protection category according to IEC 529 IP20
 Tightening torque UL 4.4 lb-in max.
 Min. insul. strip length 6 mm
 Solder pin dimension 1.0 x 1.0 mm
 Recommended pc board hole dia. Ø 1.5 mm
 Solder pin length 3.2 mm
 Pole size 2 - 24
 Color black

Dimensions in mm 1 mm = 0.0394 in.

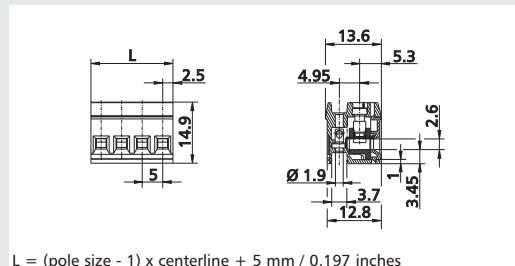

Dimensions in mm 1 mm = 0.0394 in.

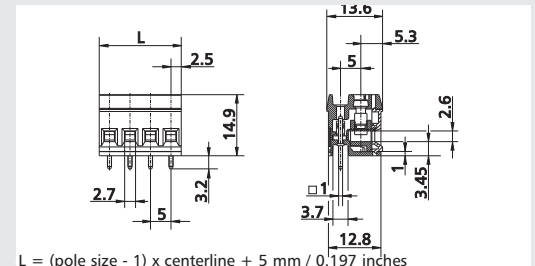

Part numbers (P/N) (information: page 56)

Type 207
 centerline 5 mm / 0.197 inches

P/N 312071

Complete the part number by adding the pole size.

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Part numbers (P/N) (information: page 56)

Type 208
 centerline 5 mm / 0.197 inches

P/N 312081

Complete the part number by adding the pole size.

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

* approval pending

* approval pending

Standard pole sizes
 Available on demand. Minimum order quantity 5000 pieces per item.

Standard pole sizes
 Available on demand. Minimum order quantity 5000 pieces per item.